



STEELY PRODUCT [®] (STEELEX PRODUCT)

Formerly



DESIGNING, MANUFACTURING & DEALS IN ALL KINDS OF MATERIAL STORAGE & HANDLING EQUIPMENTS.
 PRE-ENGINEERED & MODULAR SHELVING & PALLET RACKING, DRIVE-IN, DRIVE THROUGH RACKING, TYRE & DRUM RACKING,
 MOBILE RACKING, MULTI STORY RACKING, SMALL PARTS STORAGE METAL & **PLASTIC BINS & LOUVERED PANELS**,
 MOBILE SAFETY STEPS LADDER & SCAFFOLD, STACKABLE PALLETS, ALL KINDS OF METAL PALLETS, ALL KINDS OF **PLASTIC PALLETS**
FIRE & BURGLAR RESISTANCE IRON SAFES, CABINETS, DOORS & EQUIPMENTS. HAND PALLET TRUCK, LIFTER, STACKER & REACH TRUCKS.

OFFICE # 6, G/ FLOOR, HUMA HEIGHTS PLOT # 133 DEPOT LINES OPP: NASRA SCHOOL KHI. FACTORY, F/329-A SITE KARACHI.

☎ : + 92 - 21 - 3225 - 5286, 📞 : + 92 - 300 - 214 - 2391 / + 92 - 300 - 034 - 2391


E - M A I L : steelyproduct@yahoo.com , W E B S I T E : www.steelyproduct.com

S A L E S T A X # 11-00-9403-075-37, N.T.N # 0668965-5, CNIC # 42201-0488865-3

COMPANY PROFILE


COMPANY NAME	STEELY PRODUCT (ISO 9001 : 2008 CERTIFIED) MEMBER : CHAMBER OF COMMERCE AND INDUSTRY. MEMBERSHIP # 69812
OUR MOTTO	CQ ² =CTCOST, QUALITY, QUANTITY & COMMITMENT ON TIME
BUSINESS & PRODUCT RANGE	DESIGNING, MANUFACTURING & DEALS IN ALL KINDS OF MATERIAL STORAGE & HANDLING EQUIPMENTS PRE-ENGINEERED BULK STORAGE SHELVING & RACKING SYSTEM, DRIVE-IN, DRIVE THROUGH RACKING, TYRE RACKING, DRUM RACKING, MOBILE RACKING & SHELVING, MULTI STORY RACKING & SHELVING, MEZZANINE FLOORS, SMALL PARTS STORAGE METAL & PLASTIC BINS WITH LOUVERED PANELS, MOBILE SAFETY STEPS LADDER, HIGH WORKING PLATFORM & SCAFFOLDING, ALL KINDS OF METAL & PLASTIC PALLET FIRE & BURGLAR RESISTANCE IRON SAFE , CABINETS & EQUIPMENTS. HAND PALLET TRUCK, LIFTER, STACKER & REACH TRUCKS. (SALES & SERVICES)
CITY	KARACHI
COUNTRY	PAKISTAN
YEAR ESTABLISHED	MAY 1957
PROPRIETOR	MUHAMMAD YAQOOB
COMPANY MANAGER	MUHAMMAD JAHANGIR, MUHAMMAD BILAL
ADMIN & MARKETING OFFICE	OFFICE : OFFICE # 6, G/ FLOOR, HUMA HEIGHTS PLOT # 133 DEPOT LINES OPP: NASRA SCHOOL KHI. FACTORY : F/329-A SITE KARACHI PAKISTAN. PHONE # 92-21-3225 5286, FAX # 92-21 3223 2960. MOBILE # 0300-2142 391 E - M A I L : steelyproduct@yahoo.com, W E B S I T E : www.steelexproduct.com
TOOLS & MACHINERY	DESIGNING , METAL CUTTING , BENDING & WELDING FACILITIES WITH HIGH PERFORMANCE EQUIPMENTS.
QUALITY CONTROL	WITH HIGH SKILLED TECHNICIANS & EQUIPMENTS
APPLICATION	BANKS, OFFICES. PHARMA, FERTILIZERS, OIL & GAS CO. POWER CO. SUPER MARKETS, WAREHOUSE PROJECT & PLANTS.
BANK REFERENCE	U.B.L KAYANI SHAHEED ROAD BRANCH KARACHI. BRANCH CODE : 0699 A/C # 010-1947-6 BANK CODE : 086 - SWIFT CODE : UNIL PKKA.
SALES TAX REG NO:	11-00-9403-075-37
INCOME TAX NO:	0668 965 - 5

Steel Rack




SPECIFICATION	
SIZE	17" D X 44.5" W X 96" H (STANDARD SIZE)
SOLTED ANGLE	1.5" X 1.5" X 02 MM THICK 2" X 2" X 02 MM THICK
FLANGE SHELF	G.I. SHEET 01 MM THICK G.I. SHEET 1.2 MM THICK
G.I. NUTS & BOLTS	12 X 8 MM 25 X 8 MM (FOR JOINING OF RACKS TOGETHER)
REINFORCING BAR	01" X 01" (LENGTH DEPENDING ON SHELF SIZE)
G.I. CORNER	3.5" X 05"
TOP TIE (OPTIONAL)	1.5" X 1.5" (LENGTH DEPENDING ON AREA)
ANGLE BOOT (OPTIONAL)	1.5" X 1.5"

Pallet Rack

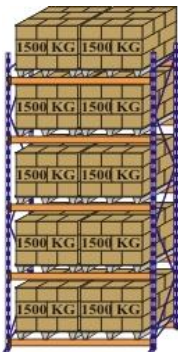


SPECIFICATION	
UPRIGHT	(90 - 95) X 65 X 02 MM THICK (SIMPLE UPRIGHT) 100 X 65 X 02 MM THICK (OMEGA SECTION) HEIGHT DEPENDING ON REQUIREMENT
BOX BEAM	(100 - 120) X 50 X 02 MM THICK
CROSS BRACING	1" X 1" SQUARE PIPE 1.2" X 1.2" SQUARE PIPE
BEAM BRACKET	111 X 125 X 03 MM (02 NOTCHING) 111 X 222 X 03 MM (03 NOTCHING) 111 X 300 X 03 MM (04 NOTCHING)
BASE PLATE	152 X 152 X 80 MM (03 MM THICK) WITH 02 RAWAL BOLTS
G.I. NUTS & BOLT WITH WASHER	70 X 08 MM HALF THEARD BOLT FOR FRAMES 20 X 08 MM HALF THEARD BOLT FOR BEAMS 20 X 08 MM HALF THEARD BOLT FOR BASE PLATE

Bulk Storage Rack



SPECIFICATION	
UPRIGHT	(90 - 95) X 65 X 02 MM THICK (SIMPLE UPRIGHT) 100 X 65 X 02 MM THICK (OMEGA SECTION) HEIGHT DEPENDING ON REQUIREMENT
STEP BEAM	(100 - 120) X 50 X 02 MM THICK
CROSS BRACING	1"X 1" SQUARE PIPE 1.2"X 1.2" SQUARE PIPE
SHELF	12 X 32 X 44.5 MM (STANDARD SIZE)
BEAM BRACKET	111 X 125 X 03 MM (02 NOTCHING) 111 X 222 X 03 MM (03 NOTCHING) 111 X 300 X 03 MM (04 NOTCHING)
BASE PLATE	152 X 152 X 80 MM (03 MM THICK) WITH 02 RAWAL BOLTS
G.I. NUTS & BOLT WITH WASHER	70 X 08 MM HALF THEARD BOLT FOR FRAMES 20 X 08 MM HALF THEARD BOLT FOR BEAMS 20 X 08 MM HALF THEARD BOLT FOR BASE PLATE

Drum Rack



SPECIFICATION	
UPRIGHT	(90 - 95) X 65 X 02 MM THICK (SIMPLE UPRIGHT) 100 X 65 X 02 MM THICK (OMEGA SECTION) HEIGHT DEPENDING ON REQUIREMENT
STEP BEAM	(100 - 120) X 50 X 02 MM THICK
CROSS BRACING	1"X 1" SQUARE PIPE 1.2"X 1.2" SQUARE PIPE
DRUM CRADLE	50 X 50 X 03 MM THICK
BEAM BRACKET	111 X 125 X 03 MM (02 NOTCHING) 111 X 222 X 03 MM (03 NOTCHING) 111 X 300 X 03 MM (04 NOTCHING)
BASE PLATE	152 X 152 X 80 MM (03 MM THICK) WITH 02 RAWAL BOLTS
G.I. NUTS & BOLT WITH WASHER	70 X 08 MM HALF THEARD BOLT FOR FRAMES 20 X 08 MM HALF THEARD BOLT FOR BEAMS 20 X 08 MM HALF THEARD BOLT FOR BASE PLATE

Plastic Pallet



SPECIFICATION	
SIZE	900 X 1100 X 140 MM HEIGHT 1000 X 1200 X 140 MM HEIGHT 1200 X 1200 X 140 MM HEIGHT
STATIC LOAD	4000 KG
DYNAMIC LOAD	1000 KG
RACKING LOAD	1000 KG
ORIGIN	CHINA
EXCELLENT FOR HACCP, GMP ENVIRONMENT	
EXCELLENT FOR USE OF MATERIAL STORAGE & HANDLING	
OIL. CHEMICALS & WATER RESISTANT	
MADE FROM "PP / PE" MATERIAL (RECYCLE	
EXCELLENT FOR 0 °C TO 80 °C DEGREE	
EFFICIENT & LONG LIFE	
BLUE COLOR	

GI Pallet



SPECIFICATION	
SIZE	45.5" X 42" x 5" HEIGHT
MATERIAL	STAINLESS STEEL (304) SHEET (PRIME QUALITY)
STATIC LOAD	5000 KG
DYNAMIC LOAD	1250 KG
FORK ENTRY	TWO WAY
FABRICATION	BY 250 TON BREAK PRESS (ENGLAND)
ERECTION	BY DC WELDING PLANT(ENGLAND)
APPLICATIONS	BEVERAGE, FOOD, PHARMACEUTICALS EXCELLENT FOR ROUGH & TOUGH ENVIRONMENT

Pipe Pallet




SPECIFICATION	
SIZE	36" X 42" X 5" 36" X 48" X 5" 39" X 48" X 5" 42" X 48" X 5" 45" X 48" X 5" 48" X 48" X 5"
STEEL PIPE	-
STAINLESS STEEL PIPE	-
GI SHEET	-
STAINLESS STEEL SHEET	-

Stackable Pallet



SPECIFICATION	
SIZE	48" X 40" x 48" HEIGHT
ANGLE	1.5" X 4.5 MM FOR INSIDE BOTTOM 2" X 4.5 MM OUTER STRUCTURE
PATTI	2.5" X 08 MM THICK FOR TOP CORNER
STATIC LOAD	5000 KG
DYNAMIC LOAD	1200 KG
ERECTION	BY DC WELDING PLANT(ENGLAND)
APPLICATIONS	BEVERAGE, FOOD, PHARMACEUTICALS EXCELLENT FOR ROUGH & TOUGH ENVIRONMENT

Drum Pallet



SPECIFICATION	
SIZE	48" X 32" x 18" HEIGHT
FRAME	3"X 1.5" X 05 MM THICK CHANAL OVER ALL 2"X 2" X 06 MM THICK FLAT STRIP

Hand Pallet Truck



SPECIFICATION	
LOAD CAPACITY	2500 KG
FORK SIZE	540 x 1210 MM
WHEELS	HEAVY / DUTY POLYURETHANE DOUBLE (SOUNDLESS)
LEAK-PROOF HYDRAULIC SYSTEM FOR TOUGH ENVIRONMENT	
210 DEGREES TURNING RADIUS IN BOTH DIRECTIONS	
LOW CAST, STRONG & LONG LIFE WTH STEELEX PRODUCT GUARANTEE	
WORLD RANKING COMPANY. FACTORY IN BELGIUM, CHINA, JAPAN, KOREA,	

Manual Stacker



SPECIFICATION	
LOAD CAPACITY	1500 KG
LIFTING HEIGHT	2.5 MTR (98")
OVERALL HEIGHT	
LOWERED HEIGHT OF FORK	1770 MM
RAISED HEIGHT	1770 MM
TIMES OF LIFTING TO TOP	
STANDARD	150-160
DOUBLE PUMP	100-110
QUICK LIFT PUMP	55-60
OVERALL FORK WIDTH/LENGTH	560 X 1150 MM
OVERALL LEGS WIDTH	1067 MM
FORK WIDTH	160 MM
DIMENSION OF WHEELS	
STEERING WHEELS	150 MM
FRONT WHEELS	150 MM
WORLD RANKING COMPANY. FACTORY IN BELGIUM, CHINA, JAPAN, KOREA,	

Semi Electric Stacker



SPECIFICATION	
LOAD CAPACITY	1500 KG
LIFTING HEIGHT	3500 MM
LOAD CENTER	600 MM
LIFTING SPEED UNLADEN	86-120 MM/S
LIFTING SPEED LADEN	25-120 MM/S
LOWERING SPEED UNLADEN	CONTROLLABLE
OVERALL FORK WIDTH X LENGTH	560 X 1150 MM
OVERALL DIMENSION	
LENGTH X WIDTH X HEIGHT	1770 X 700 X 2020 MM
FORK WIDTH	160 MM
SELF WEIGHT	400 KG
DIMENSION OF WHEELS	
STEERING WHEELS	220 MM
FRONT WHEELS	80 MM
BATTERY	12 V / 120 AH
CHARGER	220 V / 12 A
WORLD RANKING COMPANY. FACTORY IN BELGIUM, CHINA, JAPAN, KOREA,	

Fully Electric Stacker



SPECIFICATION

ELECTRIC STACKER 16-16 RA, 1.6 TON CAPACITY
WORLD RANKING COMPANY. FACTORY IN BELGIUM, CHINA, JAPAN, KOREA, USA
CURTIS AC CONTROLLER, ELECTRIC POWER STEERING WHEEL
TRIPLEX MAST WITH LIFTING HEIGHT 5.5 MTR. (18 FT)
COMPACT DESIGN WITH EUROPEAN STEEL CONSTRUCTION
SIMPLE & CONVENIENT LIFTING OPERATION SYSTEM
ENERGY SAVING & REGENERATIVE, SAFE & EFFICIENT
LIGHT & EASY MANUAL STEERING SYSTEMS
SMOOTH CONTROL OF LIFTING & LOWERING FOR HIGH PRECISION
STRADDLE LEGS

Drum Stacker



SPECIFICATION

LOAD CAPACITY	500 KG
LIFTING HEIGHT	1500 MM
210 DEGREES TURNING RADIUS IN BOTH DIRECTIONS	
LOW CAST, STRONG & LONG LIFE WTH STEELEX PRODUCT GUARANTEE	
WORLD RANKING COMPANY. FACTORY IN BELGIUM, CHINA, JAPAN, KOREA,	

Drum Lifter



SPECIFICATION

WITH LIFTING & UNLOADING MECHANISM
HOLDING CAPACITY 220 LTR
NYLON WHEELS 02 # 10" DIA & 01 # 4" DIA

Step Ladder



SPECIFICATION	
SIZE	48" HEIGHT STEP LADDER 72" HEIGHT STEP LADDER 96" HEIGHT STEP LADDER 120" HEIGHT STEP LADDER 144" HEIGHT STEP LADDER
SHEET	STEEL CHECKERED SHEET 1.5 MM THICK
PIPE	STEEL PIPE 01" X 01" X 1.2 MM THICK STEEL PIPE 01" X 02" X 1.2 MM THICK
WHEEL	4" NYLON WHEEL LOCAL MADE (LOCK ABLE)

Plastic Crates



SPECIFICATION (PK-A04)	
SIZE	210 MM H X 380 MM W X 585 MM L
CAPACITY	10 TO 12 KG
COLOR	YELLOW / GREEN




SPECIFICATION (PK-A05)	
SIZE	310 MM H X 365 MM W X 520 MM L
CAPACITY	18 TO 20 KG
WEIGHT	2.15 KG
COLOR	YELLOW / WHITE

Plastic Bins



SPECIFICATION	
SP - 01 SMALL	4" L X 3" W X 3" H
SP - 02 SMALL	7" L X 4" W X 3" H
SP - 03 MEDIUM	10" L X 6" W X 4" H
SP - 03 -A- MEDIUM	12" L X 12" W X 6" H
SP-04 LARGE	16" L X 9" W X 6" H
SP-05 LARGE	12" L X 16" W X 6" H

Plastic Bins

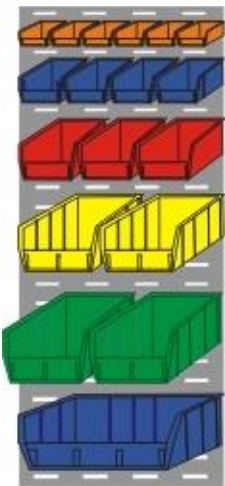

SPECIFICATION	
FRAME	50 X 50 X 02 MM THICK PIPE
FRAME SUPPORT	25 X 25 X 1.2 MM THICK PIPE

Drum Dolly




SPECIFICATION	
HOLDING CAPACITY	220 KG
WHEEL	NYLON WHEELS 06 # 03" DIA
SP - 03 MEDIUM	10" L X 6" W X 4" H
SP - 03 -A- MEDIUM	12" L X 12" W X 6" H
SP-04 LARGE	16" L X 9" W X 6" H

Platform Trolley



SPECIFICATION	
MATERIAL	MADE FROM 1.2 MM THICK STEEL SHEET
HANDLE	MADE FROM 1.5" X 1.5" X 1.5 MM THICK SQUARE PIPE
WHEEL	NYLON WHEELS 04" DIA NYLON WHEELS 06" DIA

Scaffolding

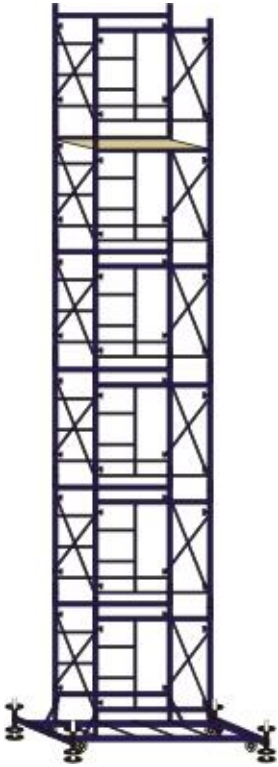

SPECIFICATION

SIZE	MOBILE SCAFFOLD 12' HEIGHT MOBILE SCAFFOLD 16' HEIGHT MOBILE SCAFFOLD 20' HEIGHT MOBILE SCAFFOLD 22' HEIGHT MOBILE SCAFFOLD 25' HEIGHT MOBILE SCAFFOLD 30' HEIGHT MOBILE SCAFFOLD 32' HEIGHT MOBILE SCAFFOLD 42' HEIGHT
VERTICAL PANEL	
SIZE	1500 MM- H X 1200 MM- W
MATERIAL	48 MM X 25 MM DIA STEEL PIPE 1.6 MM THICK
SET DIAGONAL SUPPORT	
MATERIAL	25 MM DIA STEEL PIPE 1.5 MM THICK
WORKING PLATFORM	
SIZE	22" X 48"
LOAD CAPACITY	HAVING 300 KG LOAD CAPACITY ON EACH LEVEL
PLYWOOD	17 MM THICK
WHEELS	NYLON WHEELS 6" DIA
MATERIAL	HRC STEEL THICKNESS:1.6 MM
GRADE	Q -195/235/345, ST: 37/52 (IMPORTED)
TROLLEY	WORKING LOAD CAPACITY 600 KG
WITHOUT BASE TROLLEY	WORKING LOAD CAPACITY 400 KG